

Fig. 1

FIG. 1

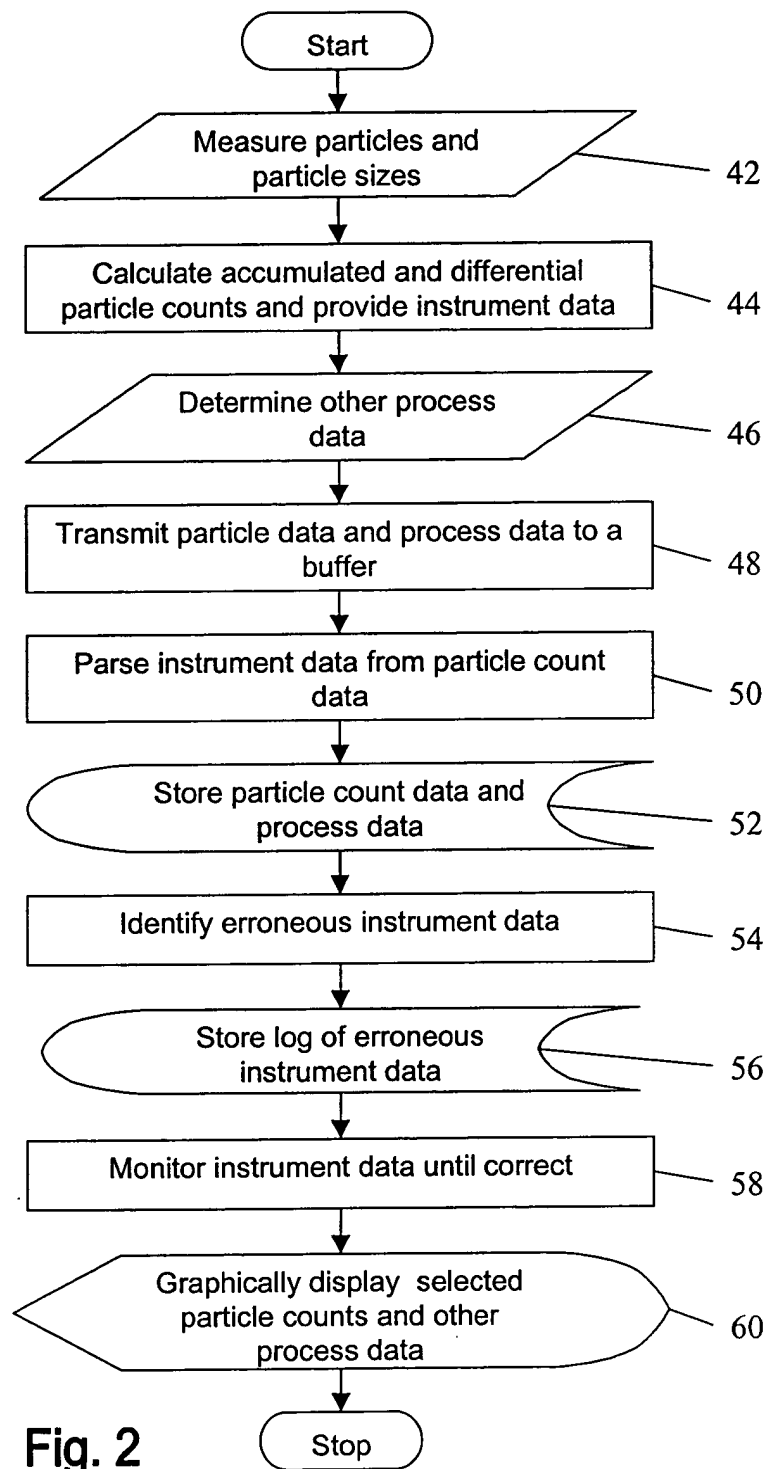


Fig. 2

PMS Driver Configuration

Main Save

Driver Configuration / Settings

Particle Counter Information:

DEVICE NAME	IP ADDRESS	AREA	BUILDING	COM PORT	DEVICE TYPE
B40 LPS	150.2.3.40	WFR	40	5	A
AREA 8LPS	150.2.3.63	CW	65	6	A
EPI CLEANROOM	150.2.3.70	EPI	15	8	A
AREA 0LPS	150.2.3.62	PW	65	7	A
EPI BAY 4.5	150.2.3.68	EPIR	15	9	A

Differential Settings:

☐ 0.10 Microns

☐ 0.3 Microns

☐ 0.15 Microns

☐ 0.5 Microns

☐ 0.2 Microns

☐ 0.7 Microns

☐ 0.25 Microns

☐ 1.0 Microns

Accumulation Settings:

☒ 0.10 Microns

☐ 0.3 Microns

☐ 0.15 Microns

☐ 0.5 Microns

☐ 0.2 Microns

☐ 0.7 Microns

☐ 0.25 Microns

☐ 1.0 Microns

Misc Configuration:

Keep Error Logs for: days

Scada Node Name:

Record Vol/Airflow on Port #:

Fig. 3




Fig. 4